

2012 OHSAA State Championships Lane Pattern



Oil Pattern Distance: 41 Feet	Reverse Brush Drop: 41 Feet	Oil Per Board: 45 uL
Forward Oil Total: 11.34 mL	Reverse Oil Total: 7.65 mL	Volume Oil Total: 18.99 mL
Forward Boards Crossed: 252 Boards	Reverse Boards Crossed: 170 Boards	Total Boards Crossed: 422 Boards

Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1 2L	2R	2	10	74	0.0	1.4	1.4	3330
2 8L	8R	1	14	25	1.4	3.3	1.9	1125
3 10L	9R	2	14	44	3.3	7.2	3.9	1980
4 12L	10R	3	14	57	7.2	13.1	5.9	2565
5 14L	12R	2	14	30	13.1	17.0	3.9	1350
6 16L	14R	2	18	22	17.0	22.1	5.1	990
7 2L	2R	0	18	0	22.1	27.0	4.9	0
8 2L	2R	0	22	0	27.0	34.0	7.0	0
9 2L	2R	0	26	0	34.0	41.0	7.0	0

Conditioner:
Type In or Select One

TransferType:
Type In or Select One

Forward




Reverse



Combined




Buff

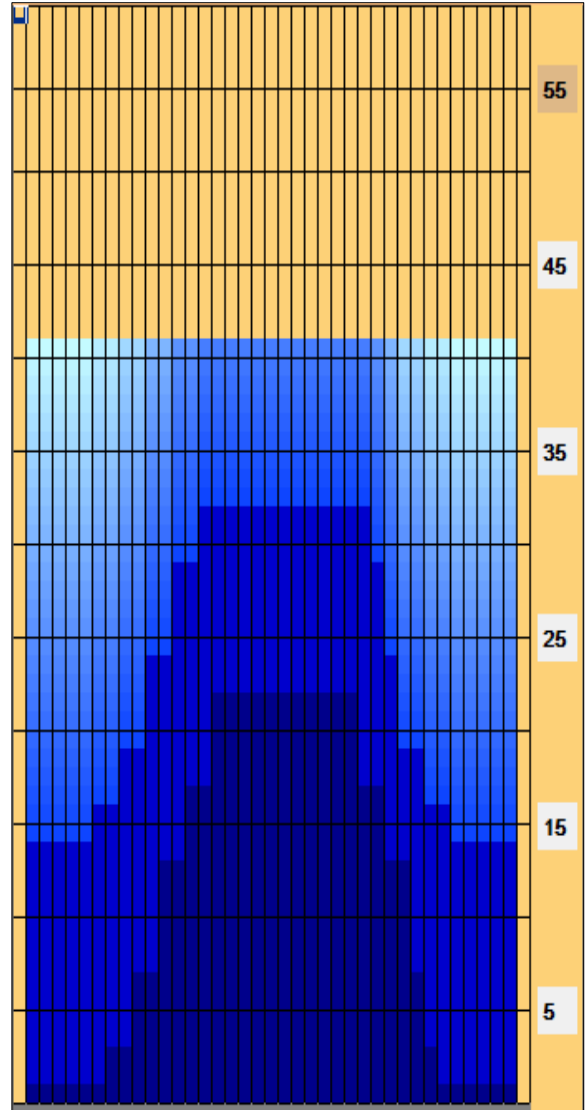

Start	Stop	Loads	Speed	Crossed	Start	End	Feet	T.Oil
1 2L	2R	0	30	0	41.0	32.0	-9.0	0
2 15L	13R	1	22	13	32.0	28.9	-3.1	585
3 13L	12R	2	18	32	28.9	23.8	-5.1	1440
4 11L	11R	2	18	38	23.8	18.7	-5.1	1710
5 9L	9R	1	18	23	18.7	16.2	-2.5	1035
6 7L	7R	1	14	27	16.2	14.3	-1.9	1215
7 2L	2R	1	14	37	14.3	12.4	-1.9	1665
8 2L	2R	0	14	0	12.4	0.0	-12.4	0

BEATEN PATH - 4541 This 41 foot pattern is much like the MIDDLE ROAD but two feet longer. Because of this added length, the options of attack will be a little more limited and the pattern will usually play where the most worn or highest friction part of the lane surface is. The players who excel in reading the lanes will easily find the BEATEN PATH and make this pattern look relatively easy. If you veer too far off the BEATEN PATH, it will play more difficult.

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track:Middle	Middle Track:Middle	Inside Track:Middle	Middle: Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	6.25	2.38	1.11	1.02	1.85	6.25

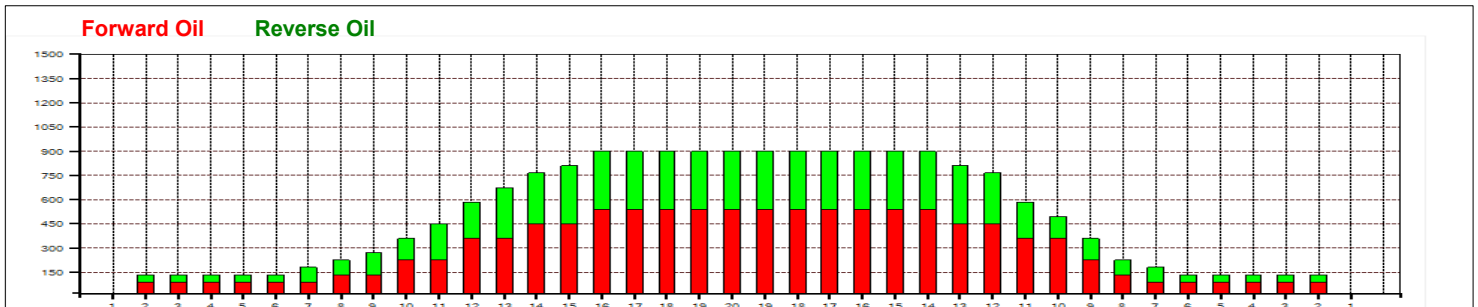



CHALLENGE
SERIES

KEGEL NAVIGATION PATTERNS





BEATEN PATH 4531



This 41 foot pattern is much like the MIDDLE ROAD but two feet longer. Because of this added length, the options of attack will be a little more limited and the pattern will usually play where the most worn or highest friction part of the lane surface is. The players who excel in reading the lanes will easily find the BEATEN PATH and make this pattern look relatively easy. If you veer too far off the BEATEN PATH, it will play more difficult.

Latitude Ratio Coordinates

22' 4.5 to 1

39' 3.1 to 1

Longitude Ratio Coordinates

Outside Taper 3.6 to 1

Inside Taper 3.3 to 1

Pattern Distance

41 Feet

Pattern Volume

Forward 12.05 mL

Reverse 12.20 mL


Total 24.25 mL



BEATEN PATH 4541

Latitude Ratio Coordinates

22' 4.5 to 1
39' 3.1 to 1

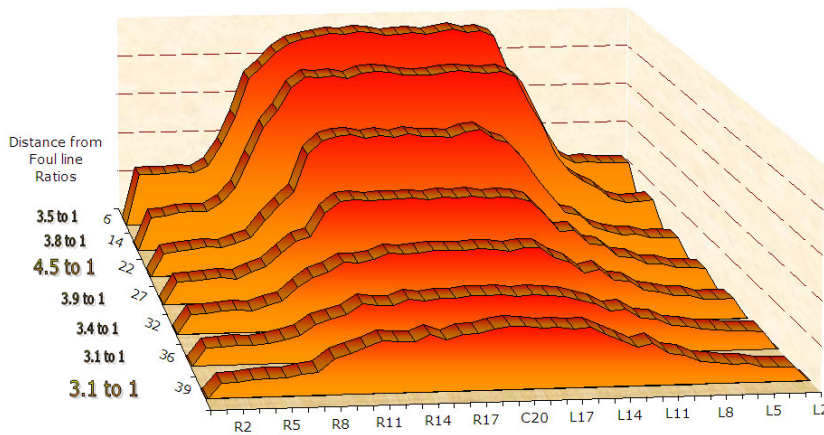

The 2D chart on the left was generated by Lane Monitor showing select tapes and ratios at key distances throughout the pattern. USBC Sport Bowling ratios are calculated at 22' and 2' before the end of the pattern. All Latitude Ratio Coordinates are calculated from these two distances.


Latitude ratios in the last half of the pattern can be an indicator of the difficulty of a pattern. Generally, the lower the ratios down lane, the more difficult the pattern.

Longitude Ratio Coordinates

Outside Taper 3.6 to 1

Inside Taper 3.3 to 1

The 3D chart below was generated by taking tapes every foot of the pattern. This gives a visual of how the conditioner tapers off from the front to the end of the pattern.

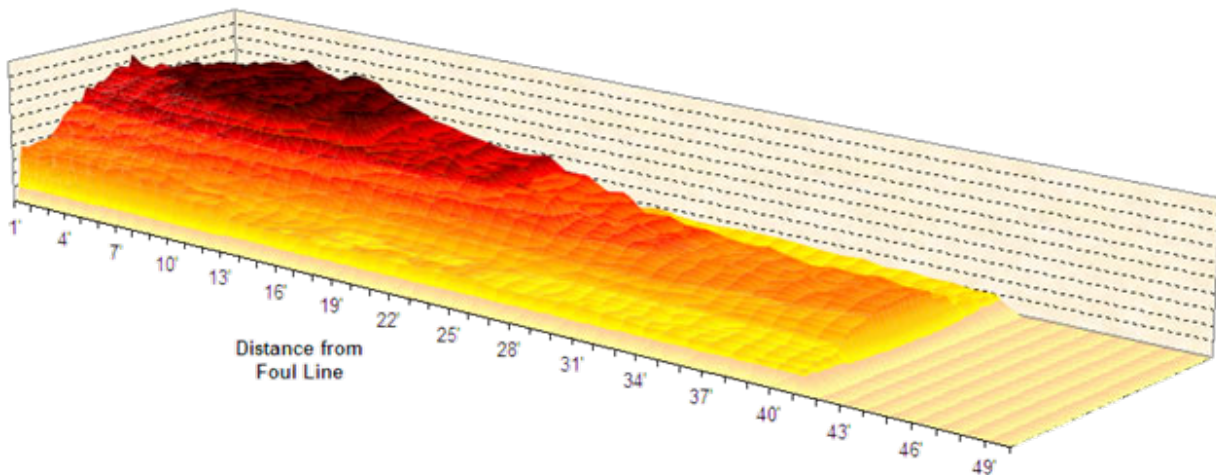



BEATEN PATH 4541

Kegel Sanction Technology™ Lane Machine Settings

Oil per Board (Pump Setting): 50 µL

Pattern Distance: 41 feet

Forward Settings										
Screen #	Left End of Stream	Right End of Stream	# Loads or Streams	Travel Speed (in/sec)	Beginning Distance of Load (feet)	Ending Distance of Load (feet)	# Boards Crossed per Load	Total Boards Crossed	Total Volume of Oil (µL)	
01F	2	2	2	10.00	0.00	1.40	37	74	3700	
02F	8	8	1	14.00	1.40	3.30	25	25	1250	
03F	10	9	2	14.00	3.30	7.20	22	44	2200	
04F	12	10	3	14.00	7.20	13.10	19	57	2850	
05F	14	12	2	14.00	13.10	17.00	15	30	1500	
06F	16	14	1	18.00	17.00	19.50	11	11	550	
07F	2	2	0	18.00	19.50	27.00				
08F	2	2	0	22.00	27.00	34.00				
09F	2	2	0	26.00	34.00	41.00				
Forward Buff Screens: 3			Forward # Boards Crossed Volume mL					241	12.05	
Reverse Settings										
Screen #	Left End of Stream	Right End of Stream	# Loads or Streams	Travel Speed (in/sec)	Beginning Distance of Load (feet)	Ending Distance of Load (feet)	# Boards Crossed per Load	Total Boards Crossed	Total Volume of Oil (µL)	
01R	2	2	0	30.00		32.00				
02R	15	13	1	22.00	32.00	28.90	13	13	650	
03R	13	12	2	18.00	28.90	23.80	16	32	1600	
04R	11	11	2	18.00	23.80	18.70	19	38	1900	
05R	9	9	1	18.00	18.70	16.20	23	23	1150	
06R	7	7	1	14.00	16.20	14.30	27	27	1350	
07R	2	2	3	14.00	14.30	8.40	37	111	5550	
08R	2	2	0	14.00	8.40	0.00				
09R										
			Reverse # Boards Crossed Volume mL					244	12.20	
			Forward plus Reverse Boards Crossed Volume mL					485	24.25	





BEATEN PATH 4541

The charts on this page are generated by Kegel's KOSI software from the lane machine program sheet.

The **OVERHEAD CHART** on the right shows where the conditioner is applied on both the forward and reverse screens. The gradient area is a calculation of how the conditioner might bleed off the buffer brush.

The **COMPOSITE GRAPH** below shows the total amount of conditioner applied to every board. A good way to think about this graph is to envision all the conditioner on the lane being pushed back to the foul line. Once all the conditioner is stacked up, this is what it would look like.

- Forward Oil
- Reverse Oil
- Combined Oil
- Buff Area

